




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE DOZER BLADE IS PARTICULARLY SUITABLE FOR DIGGING, GROUND LEVELLING AND LAYING OF LANDFILL MATERIALS. ITS STRUCTURE IS EXTREMELY STRONG AND CONCEIVED TO RESIST HIGH STRESSES. IT IS EQUIPPED WITH A HORIZONTAL PLANE TILTING SYSTEM CALLED TILT AND WITH A SIDE TILTING SYSTEM CALLED ANGLE. TWO SKID SHOES ON THE MOLDBOARD ALLOW THE ADJUSTMENT OF THE BLADE SINKING INTO THE GROUND.

	MOD.	LBD230	LBD250	LBD280
	A	MM (IN) 2300 (91)	2500 (98)	2800 (110)
	B	MM (IN) 640 (25)	640 (25)	640 (25)
	C	MM (IN) 800 (31)	800 (31)	800 (31)
WIDTH AT 30°	MM (IN)	2000 (79)	2170 (85)	2420 (95)
W/O COUPLER	KG (LB)	420 (926)	460 (1014)	500 (1102)
MAX.	BAR (PSI)	200 (2901)	200 (2901)	200 (2901)
14/8 PIN CONNECT*		STD 14 PIN	STD 14 PIN	STD 14 PIN

* THE CONNECTOR TYPE YOU REQUIRE MUST BE INDICATED AT THE TIME OF ORDERING, OTHERWISE THE 14-PIN CONNECTOR WILL BE SUPPLIED AS STANDARD.

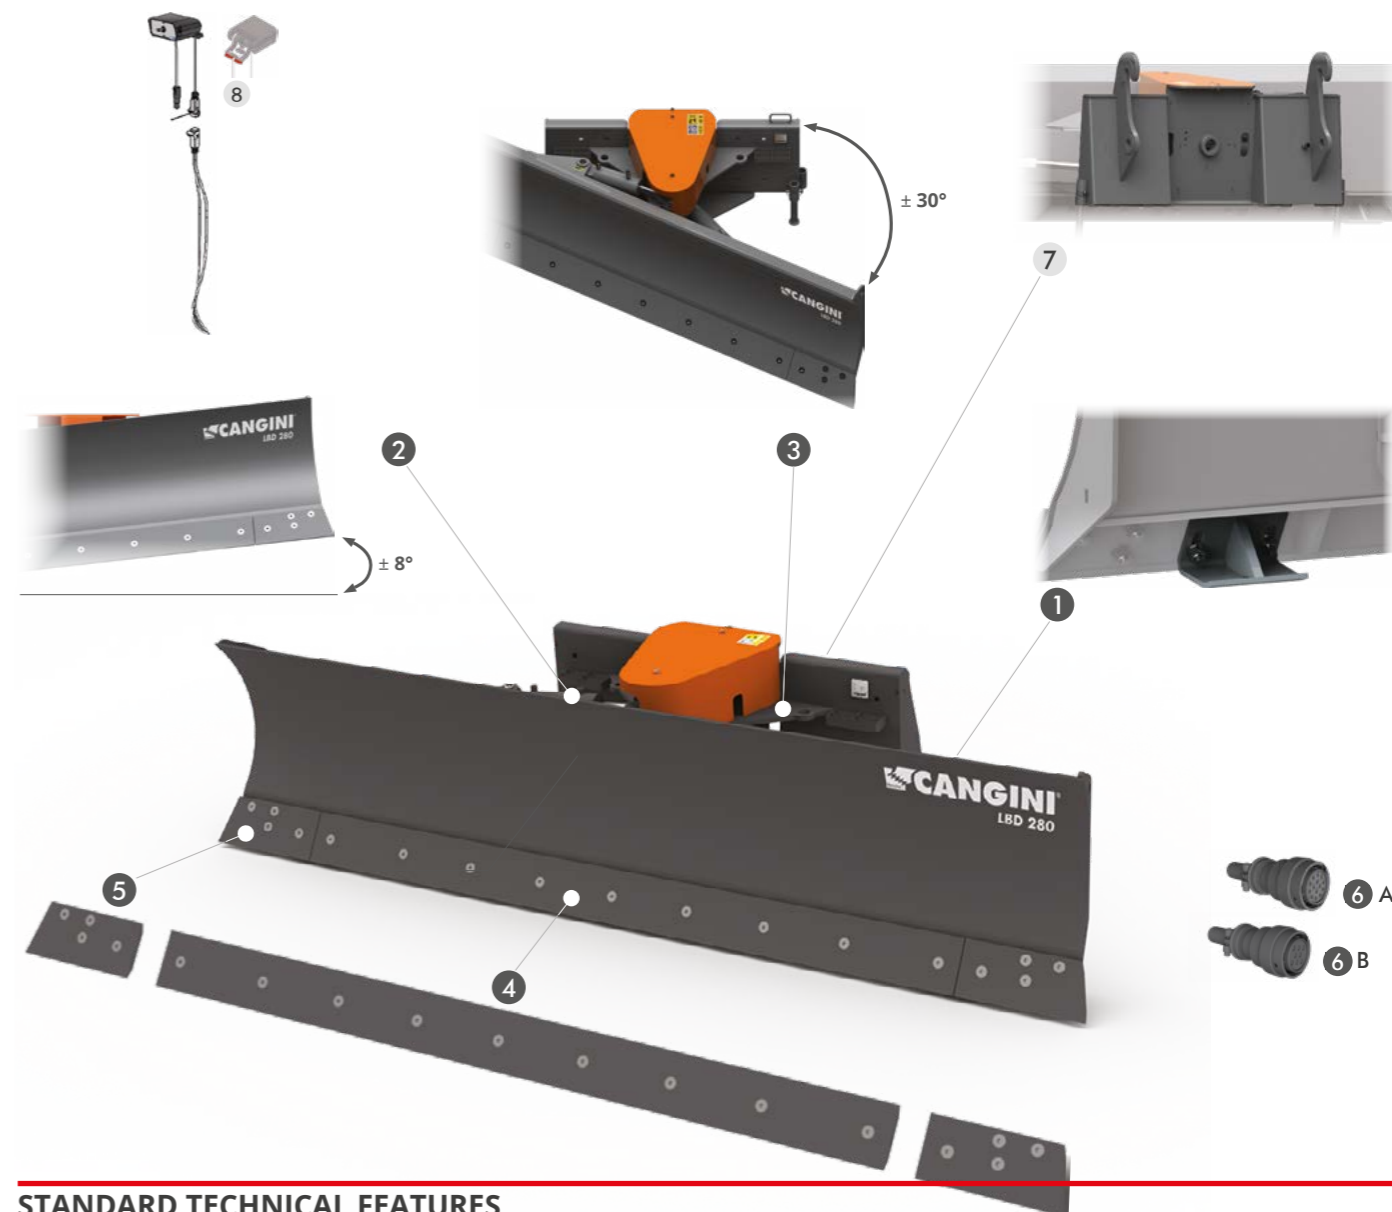

STANDARD TECHNICAL FEATURES

- 1 ADJUSTABLE SHOES**
THEY ALLOW TO ADJUST THE BLADE PENETRATION INTO THE SOIL.
- 2 TILT HORIZONTAL HYDRAULIC TILTING ADJUSTMENT OF ± 8°**
HYDRAULIC ADJUSTMENT UP TO MAX. ± 8° OF THE BLADE VERTICAL TILTING ANGLE ON BOTH SIDES.
- 3 ANGLE SIDE HYDRAULIC TILTING ADJUSTMENT OF ± 30°**
HYDRAULIC ADJUSTMENT UP TO MAX. ± 30° OF THE BLADE HORIZONTAL TILTING ANGLE ON BOTH SIDES.
- 4 REVERSIBLE AND INTERCHANGEABLE CENTRAL BLADE IN HB400**
- 5 INTERCHANGEABLE ANGLE BLADES IN HB400**
- 6 14 PIN HD36-18-14SE (A) OR 8 PIN HD36-18-8SE (B) CONNECT**
SUPPLIED SEPARATELY IF CLEAR INFORMATION ABOUT PLUG WIRING IS NOT PROVIDED

NB: THE EQUIPMENT IS SUPPLIED COMPLETE WITH PIPES AND CONNECTIONS

OPTIONAL

- 7 COUPLING SYSTEM FOR WHEEL LOADERS, BACKHOE LOADERS AND TELEHANDLERS**
- 8 ELECTRIC KIT**

*THE PLUG IS SUPPLIED DISASSEMBLED, IF NO INFORMATION ON THE PLUG WIRING IS PROVIDED, PLEASE CHECK THAT THE MAIN MACHINE IS EQUIPPED WITH A 14/8-PIN MULTIPOLE SOCKET. ON THE CONTRARY, TH ELECTRICAL KIT IS REQUIRED.