

ITS ENLARGED AND LOW-PROFILE SHAPE MAKES IT SUITABLE FOR THE REALIZATION AND MAINTENANCE OF DRAINS, DITCHES AND EARTH BANKS. SUPPLIED WITH HOLES ON WALLS AND BOTTOM FOR THE WATER DRAINAGE.

THE INSTALLATION OF BEZELS IS HIGHLY RECOMMENDED FOR BUCKETS WIDER THAN 1400 MM, IN ORDER TO AVOID DAMAGES TO THE BUCKET IN CASE OF HEAVY DUTY JOBS OR WITH PARTICULARLY HARD TERRAINS:

- WIDTH FROM 1400 TO 1500 MM: NR. 1 BEZEL
- WIDTH FROM 1600 TO 1600 MM: NR. 2 BEZELS
- WIDTH FROM 1800 TO 2200 MM: NR. 3 BEZELS

MOD.	MIDI							EXCAVATOR		
	SP30	SP35	SP40	SP40	SP45	SP50	SP55	SP60	SP65 GD	SP70 GD
TONS (LB)	0,6 - 1,2 (1323 - 2646)	1,2 - 1,8 (2646 - 3968)	2,0 - 2,5 (4409 - 5512)	2,5 - 4,0 (5512 - 8818)	4,0 - 5,0 (8818 - 11023)	5,0 - 7,5 (11023 - 16535)	7,5 - 10,0 (16535 - 22046)	10,0 - 12,0 (22046 - 26455)	12,0 - 18,0 (26456 - 39683)	18,0 - 22,0 (39683 - 48502)


STANDARD TECHNICAL FEATURES

- REINFORCING STRIPS**
THE HORIZONTAL REINFORCING STRIPS ON THE BUCKET'S REAR AND BOTTOM PROTECT THE BUCKET FROM WEAR AND INCREASE ITS RESISTANCE.

OPTIONAL

- PERFORATED BLADE**
- HB400 ADDITIONAL BOLT-ON REVERSIBLE CUTTING EDGE**
BOLTED-IN HB400 REVERSIBLE UNDERBLADE. RECOMMENDED TO WORK ON PARTICULARLY ABRASIVE SOILS.
- HB500 WELDED ADDITIONAL EDGE**
- BEZEL**
IT ENSURES A HIGHER STRUCTURAL RESISTANCE. **HIGHLY RECOMMENDED WITH BUCKETS 1400MM WIDE OR MORE.**
- REAR RAZOR**
WHEN THE MACHINE'S ARM IS KEPT CLOSED, IT ALLOWS TO FINISH SURFACES EVENLY.

SP30 MACHINE WEIGHT 0,6 - 1,2 t (1323 - 2646 lb)


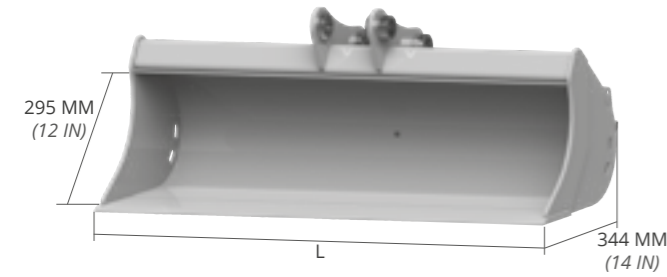


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
600 (24)	28 (62)	41 (10,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
800 (31)	37 (82)	58 (15,3)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1000 (39)	46 (101)	74 (19,5)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

6
REAR RAZOR

SP35 MACHINE WEIGHT - 1,2 - 1,8 t (2646 - 3968 lb)

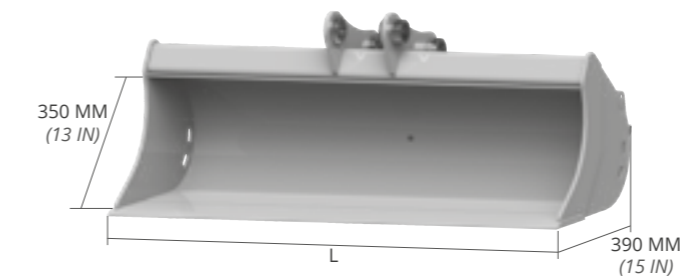



L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
800 (31)	44 (97)	75 (19,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1000 (39)	53 (117)	96 (25,4)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1200 (47)	62 (137)	117 (30,9)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

2 PERFORATED BLADE
3 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
4 HB500 WELDED ADDITIONAL EDGE
6 REAR RAZOR

SP40 MACHINE WEIGHT 2,0 - 2,5 t (4409 - 5512 lb)

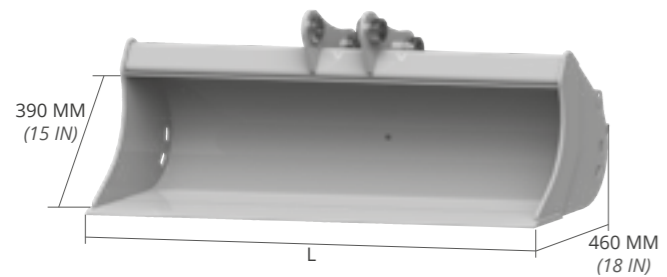


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1000 (39)	72 (159)	125 (33,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1200 (47)	85 (187)	154 (40,7)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

2 PERFORATED BLADE
3 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
4 HB500 WELDED ADDITIONAL EDGE
5 BEZEL
6 REAR RAZOR

SP40 MACHINE WEIGHT 2,5 - 4,0 t (5512 - 8818 lb)

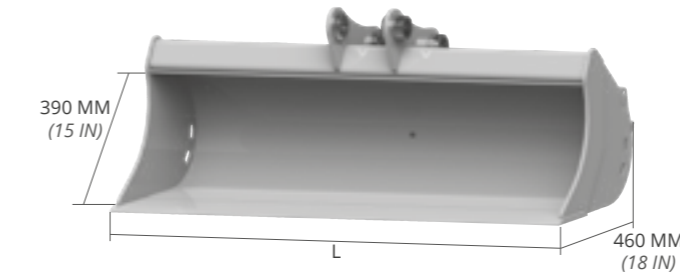

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1000 (39)	72 (159)	125 (33,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1200 (47)	85 (187)	154 (40,7)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	98 (216)	182 (48,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO


OPTIONAL

2 PERFORATED BLADE
3 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
4 HB500 WELDED ADDITIONAL EDGE
5 BEZEL
6 REAR RAZOR

* weight of the tank excluding attachment

* weight of the tank excluding attachment

SP45 MACHINE WEIGHT 4,0 - 5,0 t (8818 - 11023 lb)


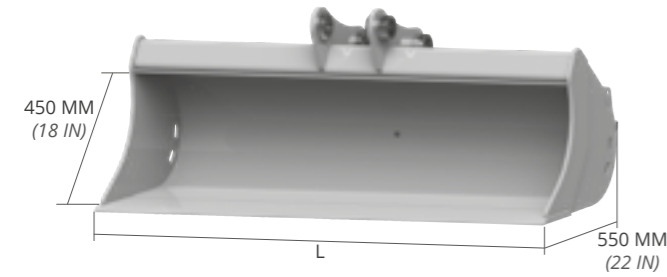


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	113 (249)	213 (56,3)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	130 (287)	254 (67,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1500 (59)	138 (304)	274 (72,4)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1600 (63)	146 (322)	295 (78)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

- 2 PERFORATED BLADE
- 3 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
- 4 HB500 WELDED ADDITIONAL EDGE
- 5 BEZEL
- 6 REAR RAZOR

SP50 SP50 MACHINE WEIGHT 5,0 - 7,5 t (11012 - 16535 lb)

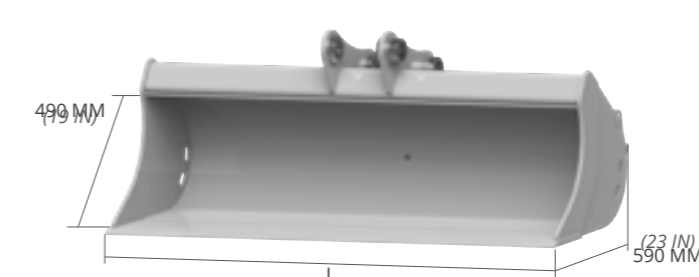


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	136 (300)	250 (66,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	156 (344)	298 (78,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1600 (63)	176 (388)	345 (91,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1800 (71)	196 (432)	392 (103,6)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

- 2 PERFORATED BLADE
- 3 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
- 4 HB500 WELDED ADDITIONAL EDGE
- 5 BEZEL
- 6 REAR RAZOR

SP55 MACHINE WEIGHT 7,5 - 10,0 t (16535 - 22046 lb)

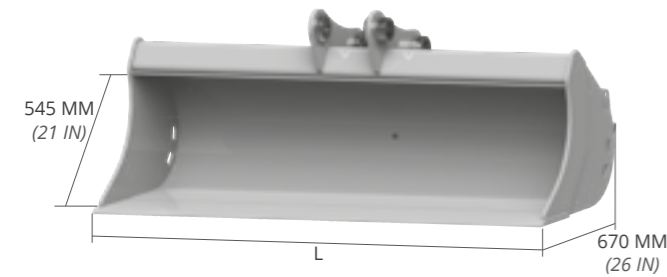


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	183 (403)	326 (86,1)	AF - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	209 (461)	387 (102,2)	AF - CS
			CR - CM
			CW - CS JANUS PRO
1600 (63)	236 (520)	447 (118,1)	AF - CS
			CR - CM
			CW - CS JANUS PRO
1800 (71)	263 (580)	507 (133,9)	AF - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

- 2 PERFORATED BLADE
- 3 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
- 4 HB500 WELDED ADDITIONAL EDGE
- 5 BEZEL
- 6 REAR RAZOR

SP60 MIDI MACHINE WEIGHT 10,0 - 12,0 t (22046 - 26455 lb)

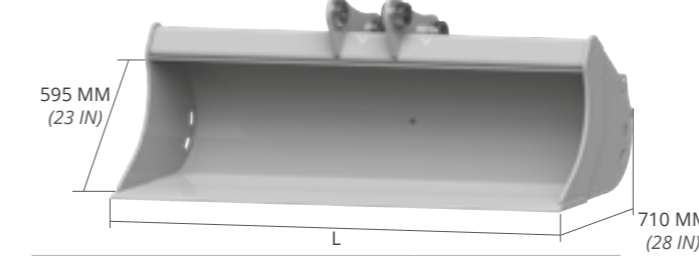

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	218 (481)	367 (97,0)	AF - CS
			CR - CM - CS JANUS PRO
			CW
1400 (55)	248 (547)	436 (115,2)	AF - CS
			CR - CM - CS JANUS PRO
			CW
1600 (63)	280 (617)	504 (133,1)	AF - CS
			CR - CM - CS JANUS PRO
			CW
1800 (71)	310 (683)	573 (151,4)	AF - CS
			CR - CM - CS JANUS PRO
			CW
2000 (79)	340 (750)	641 (169,3)	AF - CS
			CR - CM - CS JANUS PRO
			CW

OPTIONAL


- 2 PERFORATED BLADE
- 3 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
- 4 HB500 WELDED ADDITIONAL EDGE
- 5 BEZEL
- 6 REAR RAZOR

* weight of the tank excluding attachment

* weight of the tank excluding attachment

SP65 GD EXCAVATOR MACHINE WEIGHT 12,0 - 18,0 t (26456 - 39683 lb)

ADAPTERS	CS100 KG 45 (LB 99)	CS100 JANUS PRO KG 93 (LB 205)	CM180 KG 66 (LB 145)	CW20 KG 57 (LB 126)
----------	------------------------	-----------------------------------	-------------------------	------------------------

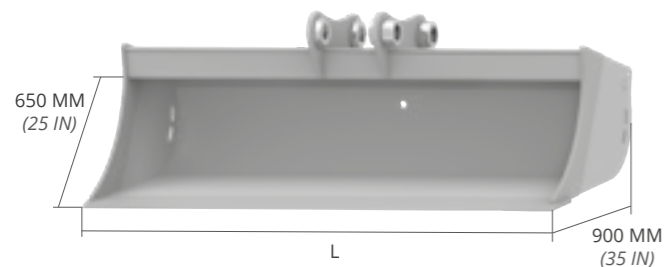


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1400 (55)	318 (701)	631 (166,7)	AF - CM
			CS - CW
			CS JANUS PRO
1500 (59)	339 (747)	665 (175,7)	AF - CM
			CS - CW
			CS JANUS PRO
1600 (63)	359 (791)	699 (184,7)	AF - CM
			CS - CW
			CS JANUS PRO
1800 (71)	400 (882)	767 (202,6)	AF - CM
			CS - CW
			CS JANUS PRO
2000 (79)	440 (970)	835 (220,6)	AF - CM
			CS - CW
			CS JANUS PRO

OPTIONAL

2	3	4	5	6
PERFORATED BLADE	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	HB500 WELDED ADDITIONAL EDGE	BEZEL	REAR RAZOR

SP70 GD MACHINE WEIGHT 18,0 - 22,0 t (39683 - 48502 lb)

ADAPTERS	CS100 KG 45 (LB 99)	CS100 JANUS PRO KG 93 (LB 205)	CM180 KG 66 (LB 145)	CW30 KG 66 (LB 145)
----------	------------------------	-----------------------------------	-------------------------	------------------------

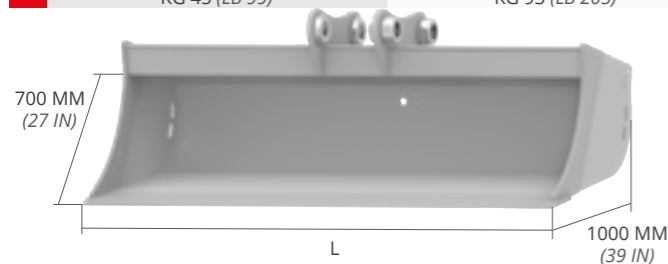

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1500 (59)	417 (919)	780 (206,1)	AF - CM
			CS - CW
			CS JANUS PRO
1600 (63)	442 (974)	820 (216,6)	AF - CM
			CS - CW
			CS JANUS PRO
1800 (71)	492 (1085)	900 (237,8)	AF - CM
			CS - CW
			CS JANUS PRO
2000 (79)	540 (1190)	980 (258,9)	AF - CM
			CS - CW
			CS JANUS PRO
2200 (87)	586 (1292)	1060 (280,0)	AF - CM
			CS - CW
			CS JANUS PRO

OPTIONAL

2	3	4	5	6
PERFORATED BLADE	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	HB500 WELDED ADDITIONAL EDGE	BEZEL	REAR RAZOR



* weight of the tank excluding attachment